

Product information ES503W/39+24 E w/o Wall Support

TOC: 15 746 04




Application

For lighting in hospitals, recuperation facilities, spas, homes for the elderly and nursing homes.


Optical system

Direct/indirect. Internal highly-specular reflector. Ceiling-oriented prismatic cover made of translucent polycarbonate, convex, with internal channel prisms, transmission degree 80 %. Silver-grey versions with interior anti-glare louvre, covered with clear panel made of polycarbonate, flush with housing, transmission degree 91 %. White versions covered with opal panel made of polycarbonate, flush with housing, transmission degree 61 %.



file TX004724
1x24W (25°)
...1x24
BZ 4/75/BZ 5
LFEC = F7
LOR 0.51

— c0-c180
— c90-c270



file TX004725
2x39W (25°)
...2x39
BZ 10
LFEC = F7
LOR 0.57

— c0-c180
— c90-c270




Luminaire body


Luminaire body made of extruded aluminium profiles with circle-segmented contour. End caps made of die-cast aluminium. white
Mounting with the aid of wall bracket

Control gear option

With electronic control gear. With electronic control gear units (E), Multi-Lamp.



mit ES 0503/2

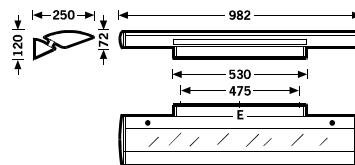

mit ES 0503/7(8)

Degree of protection	IP 40/20
Safety class	I
hot wire test	850 ° C
shock resistance	0,5 J
LFEC	F7
Cibse	BZ 4/75/BZ 5
LOR	0,51

available accessories

TOC:	article
23 546 00	ES0503/2 Wall Support Small White
23 551 00	ES0503/7 Wall Supp.Med.Wh.c/w Socket+Sw
23 552 00	ES0503/8 Wall Supp.Med.Wh.c/wSckt+PullSw